

MAGIRUS AIRCORE FF TURBINE VEHICLE



SERVING HEROES. SINCE 1864.



AIRCORE FF TURBINE VEHICLE TECHNICAL DATA

VEHICLE FIGURES

- / Chassis IVECO Daily 55S17W, 4x4 (EURO V/VI)
- / Engine power 125 kW / 170 HP
- / Wheel base 3.400 mm
- / Cabin 1 + 2
- / Gross vehicle weight 5.500 kg

CONCEPT

- / Flexible centre nozzle choice
- / Radial nozzle capacity 1.000 l/min
- / Center nozzle capacity 500 l (spray nozzles) / 2.500 l/min
- / Total water flow capacity up to 3.500 l/min
- / Electrical or hydraulic drive
- / 2 sizes available (S15 / M25)
- / Up to 80 m throwing distance
- / 8-12 bar operational pressure, max. 16 bar
- / Foam agent application possible (0,5 - 8 %)
- / Remote control possible
- / El. adjustment of the centre nozzle to spray jet / full jet
- / Compact dimensions


ADVANTAGES / SPECIAL FEATURES / BENEFITS

- / Very efficient for big fires and big surface, especially liquids fires
- / Binding of gasses and smoke, improving visibility and safety
- / Much faster heat absorption compared to current methods
- / Easy and safe in use
- / Maintenance friendly

OPTIONS

- / Water-/ Foam tank
- / Foam mixing systems
- / Light mast
- / Lifting platform
- / All versions also available on other chassis types
- / Airtubes
- / Further options on request

DETAILED VIEWS

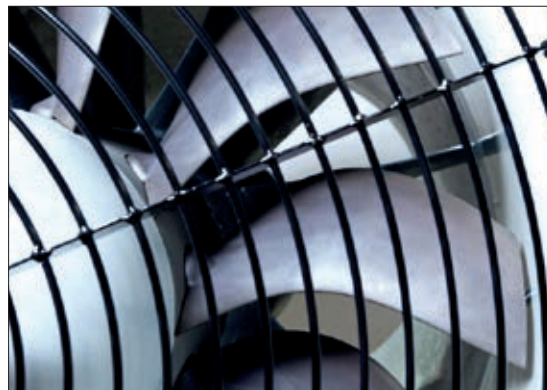

Illustrations may include additional options. We reserve the right to make technical changes or improvements at any time without prior notice. Errors and omissions excepted.

MAGIRUS GmbH • Graf-Arco-Straße 30 • 89079 Ulm
www.magirusgroup.com • magirus@cnhind.com