



2025





Adult Occupant









Safety Assist

87%

Vulnerable Road Users







86%

SPECIFICATION

| Tested Model | firefly, LHD |
|-------------------------------|--------------------|
| Body Type | - 5 door hatchback |
| Year Of Publication | 2025 |
| Kerb Weight | 1467kg |
| VIN From Which Rating Applies | - all firefly |
| Class | Small Family Car |



SAFETY EQUIPMENT

| | Driver | Passenger | Rear |
|--------------------------|--------|-----------|------|
| FRONTAL CRASH PROTECTION | | | |
| Frontal airbag | • | | _ |
| Belt pretensioner | • | • | |
| Belt loadlimiter | • | • | • |
| Knee airbag | × | × | _ |
| LATERAL CRASH PROTECTION | | | |
| Side head airbag | • | | |
| Side chest airbag | • | • | _ |
| Side pelvis airbag | • | • | _ |
| Centre Airbag | • | × | _ |

| | Driver | Passenger | Rear |
|--------------------------|--------|-----------|------|
| CHILD PROTECTION | | | |
| Isofix/i-Size | _ | × | • |
| Integrated CRS | _ | × | × |
| Airbag cut-off switch | _ | • | _ |
| Child presence detection | | × | • |
| SAFETY ASSIST | | | |
| Seat Belt Reminder | • | • | • |



SAFETY EQUIPMENT (NEXT)

| OTHER SYSTEMS | |
|---------------------------------|---|
| Active Bonnet | × |
| AEB Vulnerable Road Users | |
| AEB Pedestrian - Reverse | |
| Cyclist Dooring Prevention | |
| AEB Motorcyclist | |
| AEB Car-to-Car | |
| Speed Assistance | |
| Lane Assist System | |
| Fatigue / Distraction Detection | |

Note: Other equipment may be available on the vehicle but was not considered in the test year.


| Fitted to the vehicle as standard | Fitted to the vehicle as part of the safety pack |
|-----------------------------------|--|
| Trees to the vernere as started a | There is the vernere as part of the solvery pack |


O Not fitted to the test vehicle but available as option or as part of the safety pack X Not available — Not applicable






Total 38.8 Pts / 96%

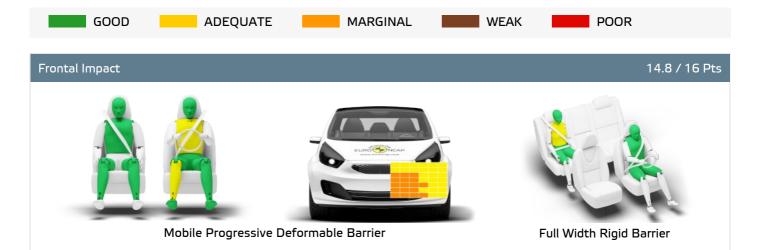

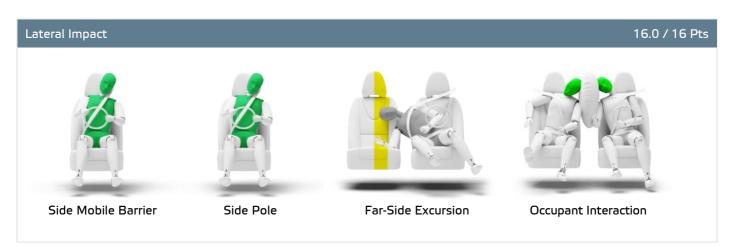

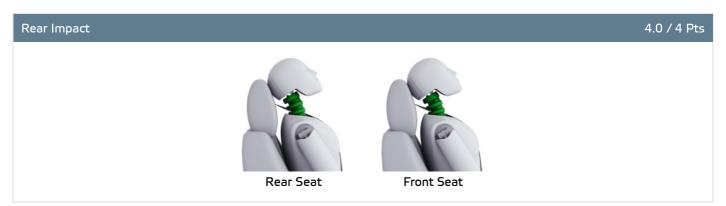



ADULT OCCUPANT

Total 38.8 Pts / 96%

| GOOD ADEQUATE | MARGINAL WEAK POOR |
|------------------------|--------------------------|
| Rescue and Extrication | 4.0 / 4 Pts |
| Rescue Sheet | Available, ISO compliant |
| Advanced eCall | Available |
| Multi Collision Brake | Available |
| Submergence Check | Compliant |

Comments

The passenger compartment of the firefly remained stable in the frontal offset test. Dummy readings indicated good protection of the knees and femurs of both the driver and the front seat passenger. firefly showed that a similar level of protection would be provided to occupants of different sizes and to those sitting in different positions. Analysis of the deceleration of the impact trolley during the test, and analysis of the deformable barrier after the test, revealed that the firefly would be a benign impact partner in a frontal collision. In the full-width rigid barrier test, protection was good for all critical body regions of the driver and at least adequate for the rear seat passenger. In both the side barrier test and the more severe side pole impact, good protection was provided to all critical body areas and the firefly scored maximum points in this part of the assessment. Control of excursion (the extent to which a body is thrown to the other side of the vehicle when it is hit from the far side) was found to be adequate. The firefly has a countermeasure to mitigate against occupant-to-occupant injuries in such impacts. The airbag performed well in Euro NCAP's tests with dummy readings indicating good protection for both the driver and passenger. Tests on the front seats and head restraints demonstrated good protection against whiplash injuries in the event of a rear-end collision. A geometric analysis of the rear seats also indicated good whiplash protection. The car has an advanced eCall system which alerts the emergency services in the event of a crash, and a system to prevent secondary impacts after the car has been in a collision. firefly demonstrated that the doors and windows would be openable to allow occupants to escape in the event of vehicle submergence.



Crash Test Performance based on 6 & 10 year old children

23.4 / 24 Pts





Restraint for 6 year old child: Cybex Solution Z i-Fix Restraint for 10 year old child: Osann Boost R129

7.5 / 13 Pts Safety Features

| | Front Passenger | 2nd row outboard | 2nd row center |
|--------------------------|--------------------|---------------------|-------------------|
| Isofix | × | • | × |
| i-Size | × | • | × |
| Integrated CRS | × | × | × |
| Top tether | × | • | × |
| Child Presence Detection | × | • | • |

Fitted to test car as standard

O Not on test car but available as option

X Not available

CRS Installation Check 12.0 / 12 Pts

| 🕒 i-Size | Seat Position | | | | |
|----------|---------------|--------------------------|------|---------|-------|
| | Frc | ont | | 2nd row | |
| | | ⊗ *⁄ ₂ | Left | center | Right |
| E: | _ | _ | • | _ | • |

Easy

Difficult

Safety critical

★ Not allowed



Airbag ON Rearward facing restraint installation not allowed

Airbag OFF



CHILD OCCUPANT

Total 42.9 Pts / 87%

| l sofix | Seat Position | | | | | |
|----------------|---------------|----------------|------|---------|-------|--|
| | Fro | ont | | 2nd row | | |
| | | ⊗ . ∠ 2 | Left | center | Right | |
| | _ | _ | • | _ | • | |
| \\\\\ | _ | _ | • | _ | • | |
| K | _ | _ | • | _ | • | |
| E | _ | _ | • | _ | • | |
| | _ | _ | • | _ | • | |
| | _ | _ | • | _ | • | |

Easy

Difficult

Safety critical

× Not allowed

Airbag ON Rearward facing restraint installation not allowed

⊗∴ Airbag OFF

| Seatbelt Attached | Seat Position | | | | |
|-------------------|---------------|-----------|------|---------|-------|
| | Fre | ont | | 2nd row | |
| | | ⊗.*. ~ | Left | center | Right |
| | × | • | • | • | • |
| | × | • | • | • | • |
| E | × | • | • | • | • |
| E | × | • | • | • | • |
| | × | • | • | • | • |
| | × | • | • | • | • |

Easy

Difficult

Safety critical

× Not allowed

Airbag ON Rearward facing restraint installation not allowed

🔀 Airbag OFF





Total 42.9 Pts / 87%

Comments

In both the frontal offset and the side barrier tests, protection of all critical parts of the body was good or adequate for both the 6 and 10 year dummies. The front passenger airbag can be disabled to allow a rearward-facing child restraint to be used in that seating position. Clear information is provided to the driver regarding the status of the airbag and the system was rewarded. The firefly is equipped with a direct 'child presence detection' system, which issues a warning when it detects that a child or infant has been left in the car. All of the child restraint types for which the firefly is designed could be properly installed and accommodated in the car.



🚶 VULNERABLE ROAD USERS

Total 51.7 Pts / 82%

| GOOD | ADEQUATE | MARGINAL | WEAK | POOR | |
|------|----------|----------|------|------|--|

VRU Impact Protection

27.2 / 36 Pts



| Pedestrian & Cyclist Head | 10.7 Pts |
|---------------------------|----------|
| Pelvis | 3.0 Pts |
| Femur | 4.5 Pts |
| Knee & Tibia | 9.0 Pts |

VRU Impact Mitigation 24.6 / 27 Pts

| System Name | AEB |
|--|---|
| Туре | Auto-Brake with Forward Collision Warning |
| Operational From | 4 km/h |
| PERFORMANCE PE | |

AEB Pedestrian 7.4 / 9 Pts

| Scenario | Day time | Night time |
|---|----------|------------|
| Car reversing into adult or child | | _ |
| Adult crossing a road into which a car is turning | | _ |
| Adult crossing the road | | |
| Child running from behind parked vehicles | | |
| Adult along the roadside | | |

__ Currently not tested

AEB Cyclist 7.9 / 8 Pts

| Scenario Scenario | Day time |
|--|----------|
| Approaching cyclist crossing from behind parked vehicles | |
| Turning across path of an oncoming cyclist | |
| Approaching a crossing cyclist | |
| Approaching a cyclist along the roadside | |



🚶 VULNERABLE ROAD USERS

Total 51.7 Pts / 82%



| Scenario | |
|---------------------------|--------------------------|
| Dooring a passing cyclist | warning, all side doors" |

AEB Motorcyclist 5.5 / 6 Pts

| Scenario | Autobrake function only | Driver reacts to warning |
|--|-------------------------|--------------------------|
| Approaching a stationary motorcyclist | | |
| Approaching a braking motorcyclist | | |
| Turn across the path of an oncoming motorcyclist | | _ |

Currently not tested

Lane Support Motorcyclist

3.0 / 3 Pts

| Scenario | Day time |
|---|----------|
| Changing lane across the path of an oncoming motorcyclist | |
| Changing lane across the path of an overtaking motorcyclist | |

Comments

Protection of the head of a struck pedestrian or cyclist was largely good or adequate, with poor results recorded on the stiff windscreen pillars and at the base and top of the screen. Protection of the pelvis was mostly good. Protection of the femur and that of the knee and tibia was good at all test locations, and the firefly scored maximum points in these parts of the assessment. The autonomous emergency braking system of the firefly responds to vulnerable road users such as pedestrians and cyclists as well as to other vehicles. In tests of its response to pedestrians, the system performed well, with marginal protection for those to the rear of the car. The system performed well in tests of its reaction to cyclists, including protection against 'dooring', in which a door is opened into the path of a cyclist approaching from behind. The system's response to motorcyclists was good.

Distraction

Long & Short Distraction and Phone Use



Total 15.6 Pts / 86%

| System Name | Lane assist |
|-------------------------|-------------|
| Туре | LKA and ELK |
| Operational From | 60 km/h |
| PERFORMANCE | |
| Emergency Lane Keeping | GOOD |
| Lane Keep Assist | GOOD |
| Human Machine Interface | GOOD |

AEB Car-to-Car 7.8 / 9 Pts

| System Name | AEB |
|------------------|--|
| Туре | Autonomous emergency braking and forward collision warning |
| Operational From | 4 km/h |
| Sensor Used | camera |

| Scenario | Autobrake function only | Driver reacts to warning |
|--|-------------------------|--------------------------|
| Approaching a car crossing a junction | | |
| Approaching a car head-on | | _ |
| Turning across the path of an oncoming car | | _ |
| Approaching a stationary car | | |
| Approaching a slower moving car | | _ |
| Approaching a braking car | | _ |

Currently not tested





Total 15.6 Pts / 86%

Comments

Overall, the performance of the autonomous emergency braking (AEB) system was good in tests of its reaction to other vehicles. A seatbelt reminder system is fitted as standard to the front and rear seats. The car has a direct driver status monitoring system as standard, detecting driver fatigue and all but one of the types of distraction currently assessed by Euro NCAP. The lane support system gently corrects the vehicle's path if it is drifting out of lane and also intervenes in some more critical situations. The speed assistance system identifies the local speed limit. The driver can choose to allow the limiter to be set automatically by the system.



RATING VALIDITY

Variants of Model Range

| Body Type | Engine | Model Name/Code | Drivetrain | Rating Applies | |
|------------------|----------|-----------------|------------|----------------|----------|
| | | | | LHD | RHD |
| 5 door hatchback | Electric | firefly * | 4 x 2 | ✓ | ✓ |

Annual Reviews and Facelifts

| Date | Event | Outcome | |
|----------------|------------------|--------------|---|
| September 2025 | Rating Published | 2025 🖈 🖈 🖈 🖈 | ✓ |

^{*} Tested variant